


Steam Castle


USER GUIDE

1. Motherboard Installation


Motherboard Compatible: MICRO-ATX / MINI-ITX

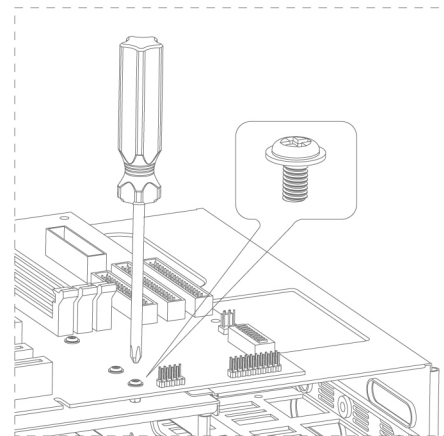


2. 5.25" Drive Bay Installation

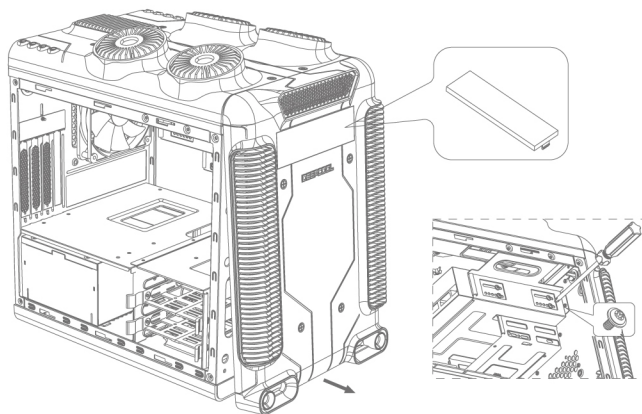


3. HDD Installation

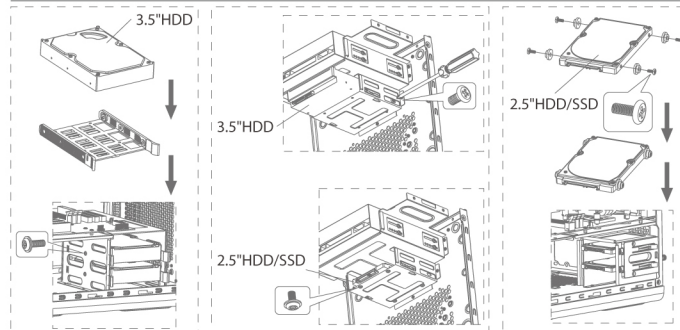

4. Power Supply Installation

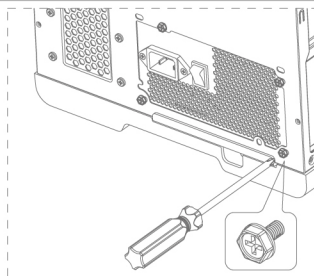


5. PCI card Installation

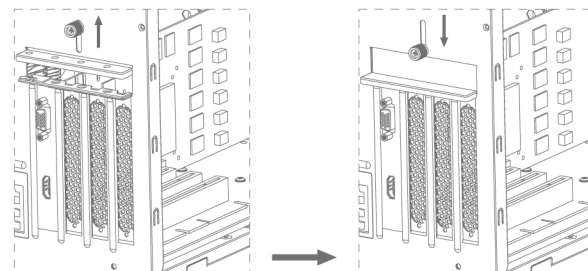

6. I/O / Outside Control

Connect PCB cable and fan cables first, then push this button to change LED colors, rotate it to adjust LED brightness and fan speed.
This device and functions applied on some specific models only!

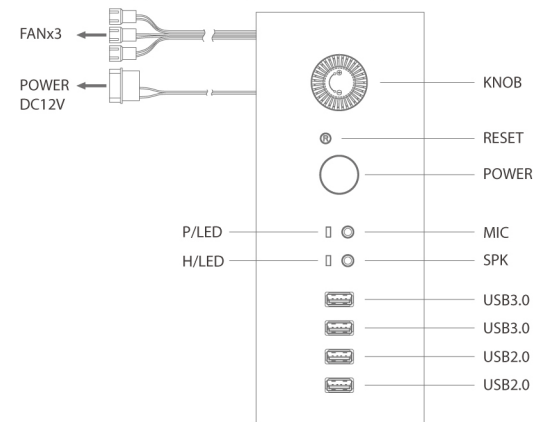

7. Cable Connection

	Panel Connector	High Definition Audio (Azalia)	USB 2.0 Connector	USB 3.0 Connector
	IDELED+ IDELED- Ground Reset NC PLED+ PLED- PWR GND No Pin	MIC2_L MIC2_R HP_R Jack_Sense HP_L AGND PRESENSE# MIC2_JD No Pin HP_HD	USB+5V USB_P- USB_P+ GND No Pin USB+5V USB_P- USB_P+ GND NC	IntA_P2_D+ IntA_P2_D- IntA_P2_SSTX+ IntA_P2_SSTX-GND IntA_P2_SSRX+ IntA_P2_SSRX-VBUS ID IntA_P1_D+ IntA_P1_D- GND IntA_P1_SSTX+ IntA_P1_SSTX-GND IntA_P1_SSRX+ IntA_P1_SSRX-VBUS
	Panel Connector	HD Audio Connector	USB 2.0 Connector	USB 3.0 Connector
	POWER SW RESET SW PWR Ground Reset GND H.D.D LED POW LED- POW LED+ IDELED+ IDELED- PLED- PLED+			

8. Cooling fan installation capacity

Front: 1x120 / 140 / 200mm fan	Direction: inlet
Top: 2x120 / 140mm fan	Direction: outlet
Rear: 1x120mm / 140mm fan	Direction: outlet

9. Accessories and Components

M3x5mm Screw for 2.5"SSD/ODD/MB 29pcs	6#-32x10 Screw for 3.5"HDD rack 16pcs
Copper Stand Off 5pcs	M3x8.6mm Screw for 2.5"HDD/SSD 8pcs
MB Stand Off Socket 1pcs	6#-32 Screw for PSU 4pcs
Cable tie 10pcs	Rubber for 2.5"SSD 8pcs